




Asus Eee PC 1005HA Keyboard Replacement

Replace the keyboard in your Asus Eee PC 1005HA.

Written By: Chris Beichler

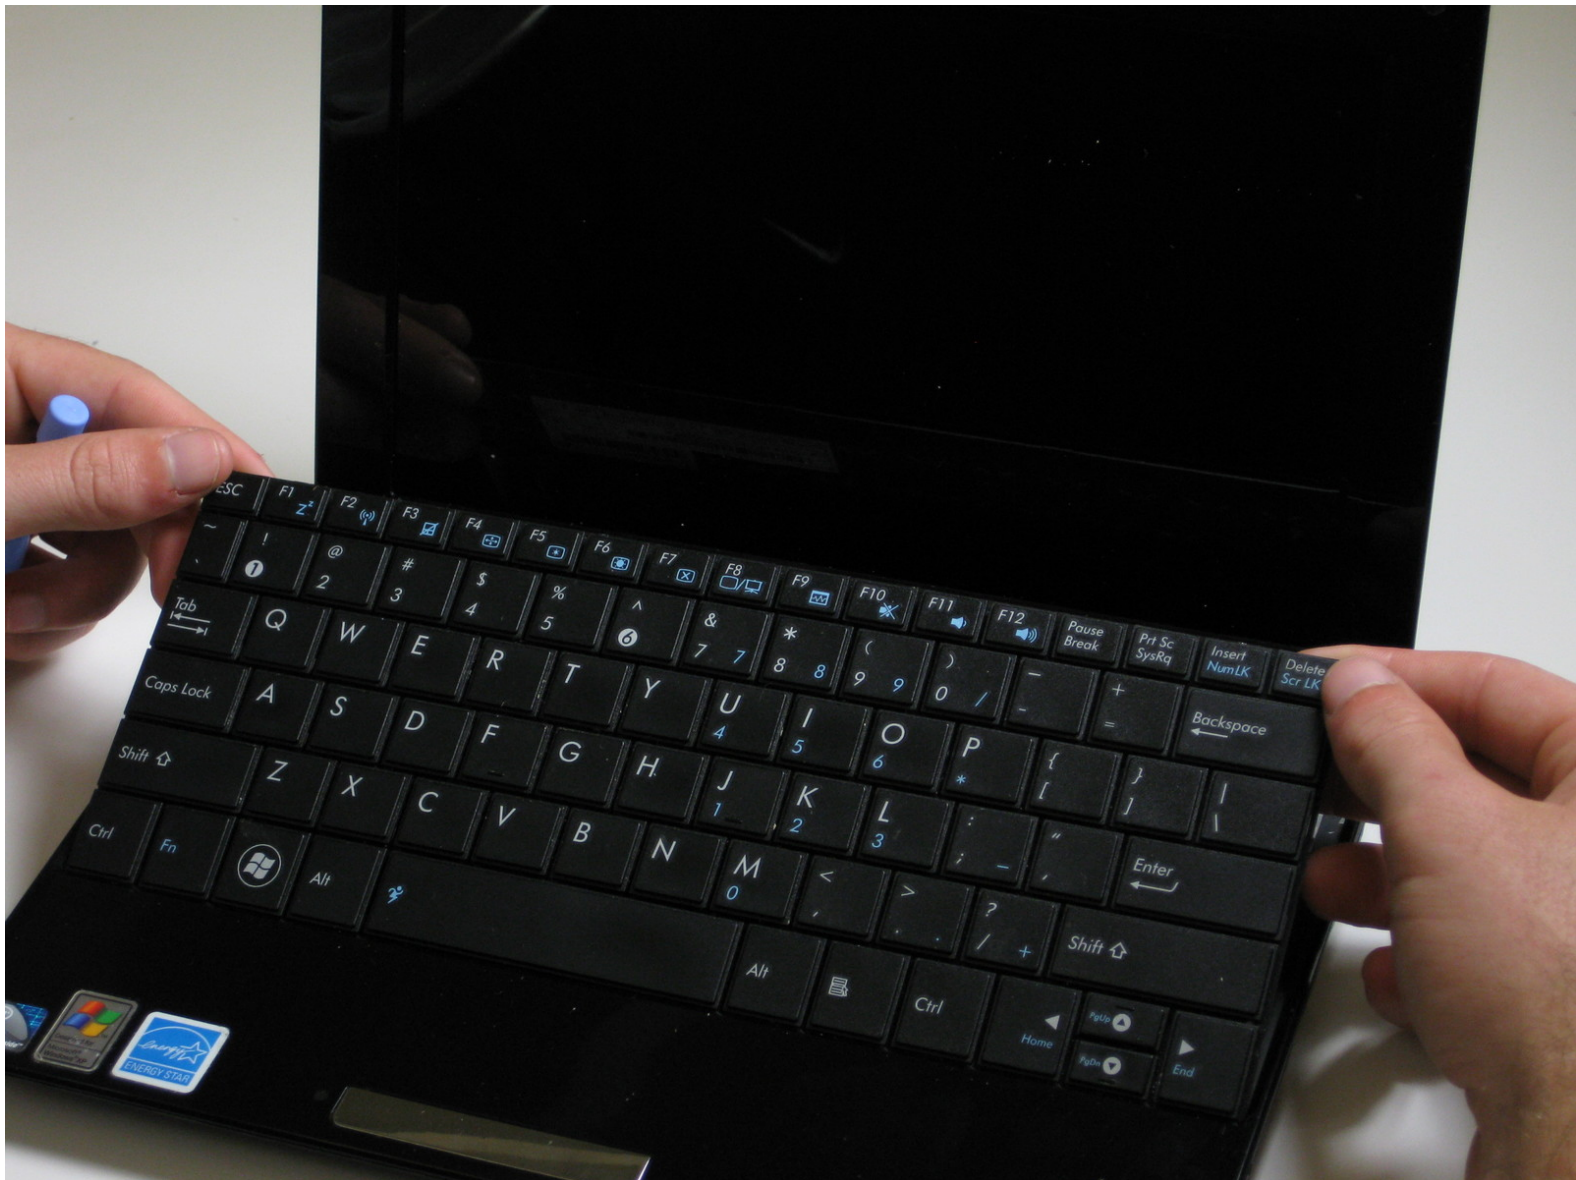

INTRODUCTION

Use this guide to replace the keyboard in the Asus Eee PC 1005HA.

TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery




- Lay the laptop upside down.
- Locate the two battery lock tabs.

Step 2



- Slide the tabs outward to unlock the battery.
- ❗ The left tab will remain unlocked, while the right tab must be held.
- Holding the right tab open, slide the battery out of the laptop.


Step 3 — Keyboard

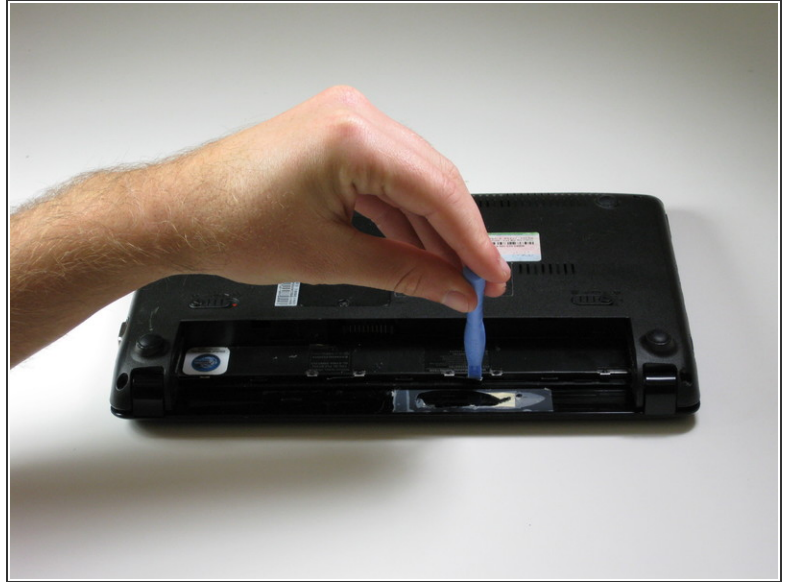

- Use a plastic opening tool to pull out the four metal latches in the battery cavity.

⚠ Do not apply too much pressure to the latches. They cannot be removed, and will bend if forced.


Step 4

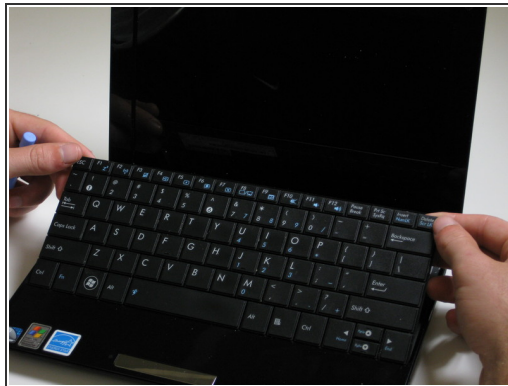

- Flip the laptop over and open the display.
- Use a plastic opening tool to lift the edge of the keyboard nearest the display.
- Gently lift the keyboard and slide it towards the display.

⚠ Do not completely remove the keyboard. A ribbon cable connects the underside of the keyboard to the laptop.

Step 5

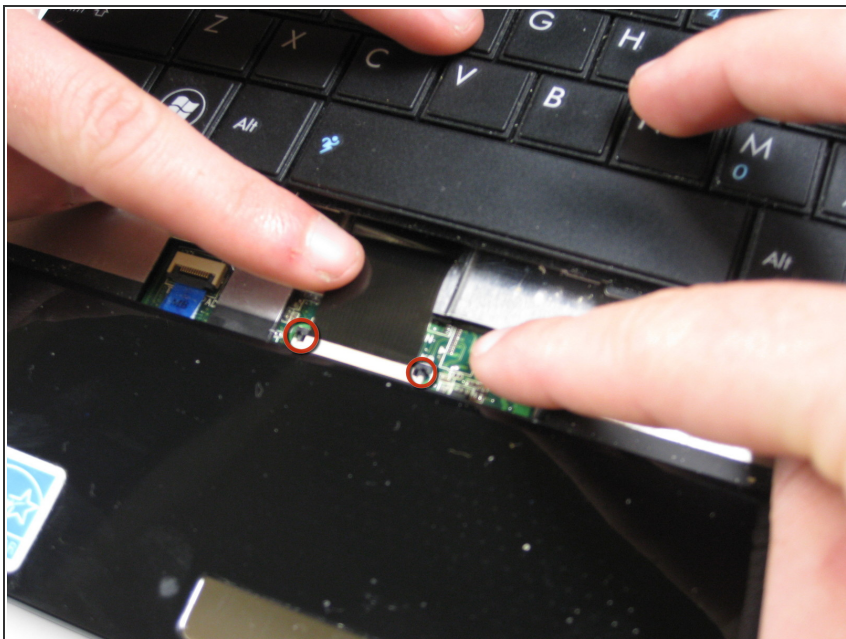

- Using a spudger, release the tabs on the keyboard ribbon cable ZIF connector.
- ⓘ Depending on the variation of this model, the tabs on this ZIF connector will either flip up towards the display or push out towards the display.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 11:01:44 AM.